

# ONCILLA M1

## Pan & Tilt System



### | General Specifications

Payload Type	Antenna / Camera / Satellite
Azimuth / Pan movement	±180°
Elevation / Tilt movement	±90°
Self-Weight	3 kg
Control mode	Speed / Position
Communication	Ethernet TCP ( Option - RS232 )
Environmental protection	IP66
Power consumption	24V & 3Amp
Max Payload (balanced)	Up to 10 kg
Max Acceleration	100 °/Sec <sup>2</sup>
Speed (balanced)	Up to 300 °/Sec
Position Accuracy	±0.005 ° (18 bit absolute Encoder)
Payload mounting options	Side mount / Top mount



**PAYLOAD**  
UP to 10 kg




**POSITION ACCURACY**  
±0.005 °



**SPEED**  
Up to 300 °/Sec

## | MICD

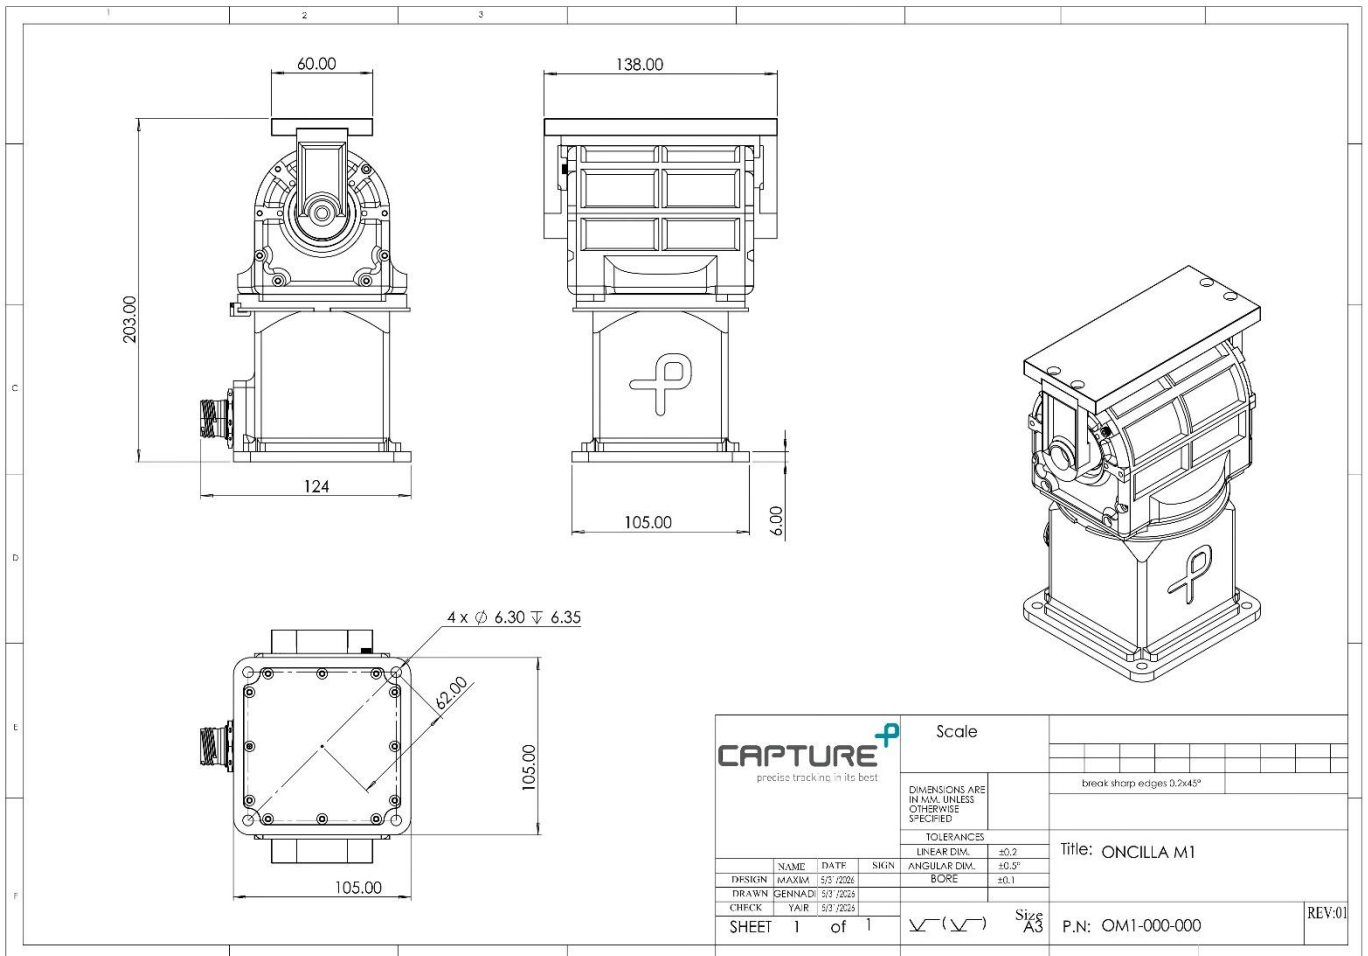

Pictures are for illustration purposes only.



### Contact us at:

CAPTURE SYSTEMS LTD,  
Ravnitzky St.6, Petach Tikva, Israel  
Phone: +972-3-3038108  
Fax: +972-3-6200621  
sales@capture-sys.com  
www.capture-sys.com