

ONCILLA

Pan & System



| General Specifications

Payload Type	Antenna / Camera / Satellite
Azimuth / Pan movement	Nx360° or up to 360°
Elevation / Tilt movement	Up to 180°
Self-Weight	~4.5 kg
Control mode	Speed / Position
Communication	Ethernet TCP (Option - RS232)
Environmental protection	IP65
Power consumption	24-36V & 3Amp
Max Payload (balanced)	40 kg
Max Acceleration	100 °/Sec ²
Speed (balanced)	0.001-7 °/Sec
Position Accuracy	±0.1 °
Resolution	0.0007 °





PAYLOAD
40 kg



POSITION ACCURACY
±0.1 °



SPEED
0.001 - 7 °/Sec

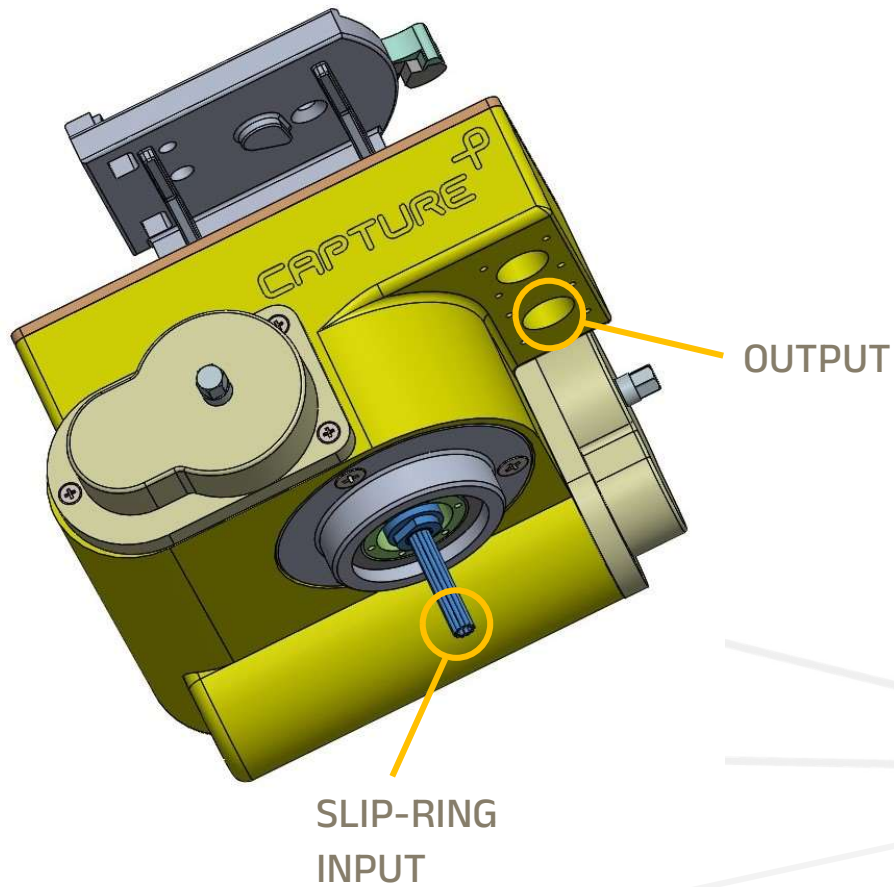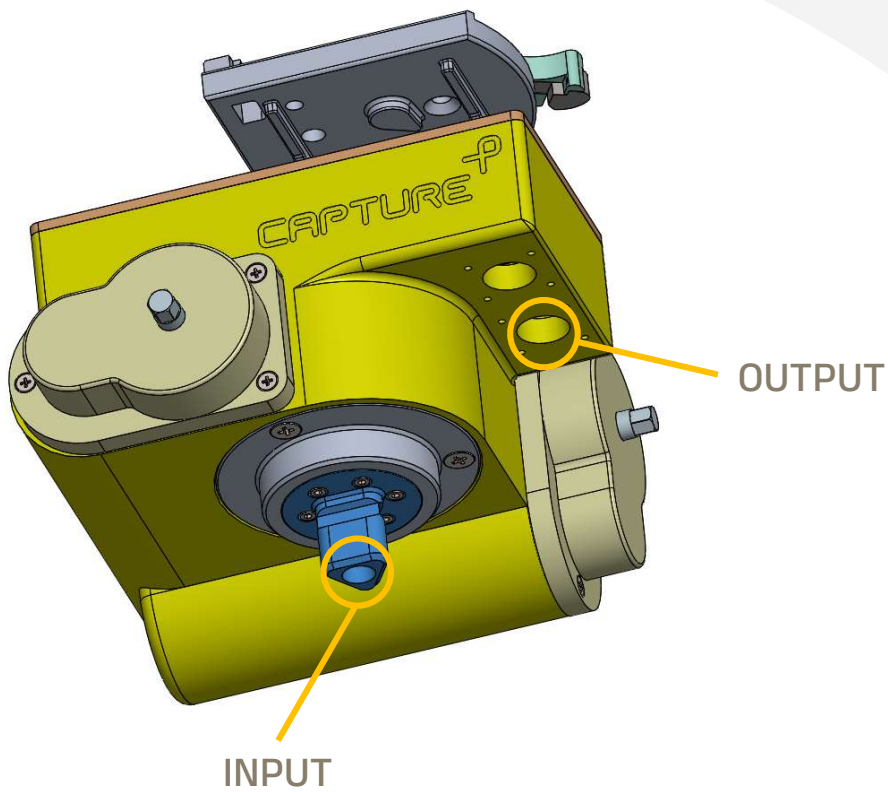


Pictures are for illustration purposes only.




Contact us at:

CAPTURE SYSTEMS LTD,
Ravnitzky St.6, Petach Tikva, Israel
Phone: +972-3-3038108
Fax: +972-3-6200621
sales@capture-sys.com
www.capture-sys.com

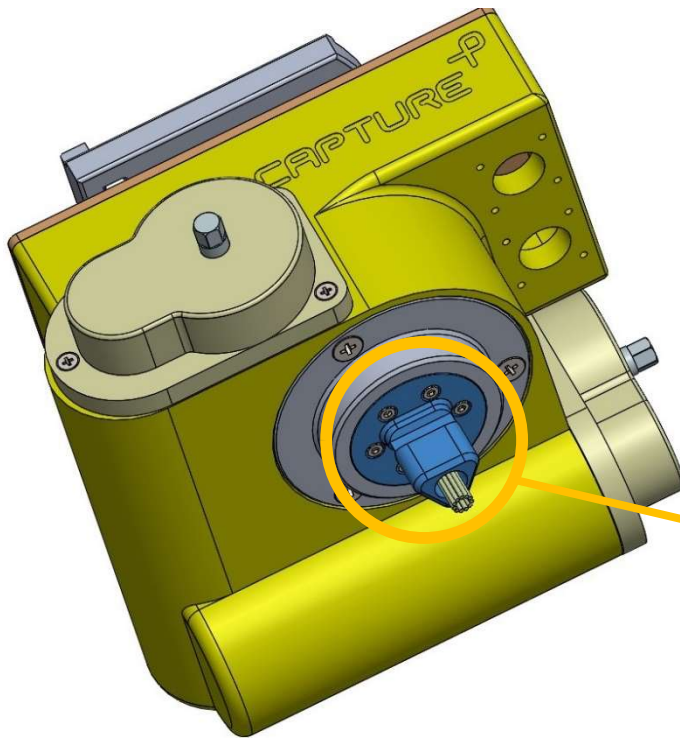

THIS PART CAN BE
MODIFIED

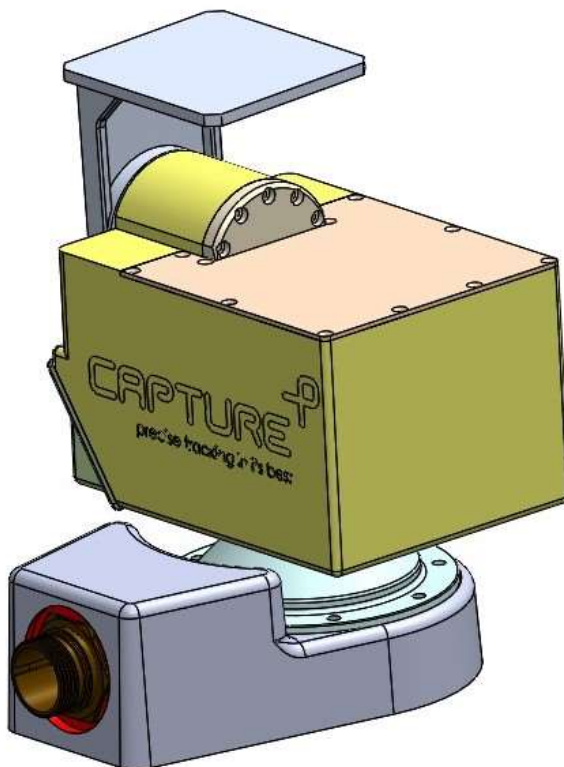


FULLY MOTORIZED
UNIT



Contact us at:

CAPTURE SYSTEMS LTD,
Ravnitzky St.6, Petach Tikva, Israel
Phone: +972-3-3038108
Fax: +972-3-6200621
sales@capture-sys.com
www.capture-sys.com

| MICD

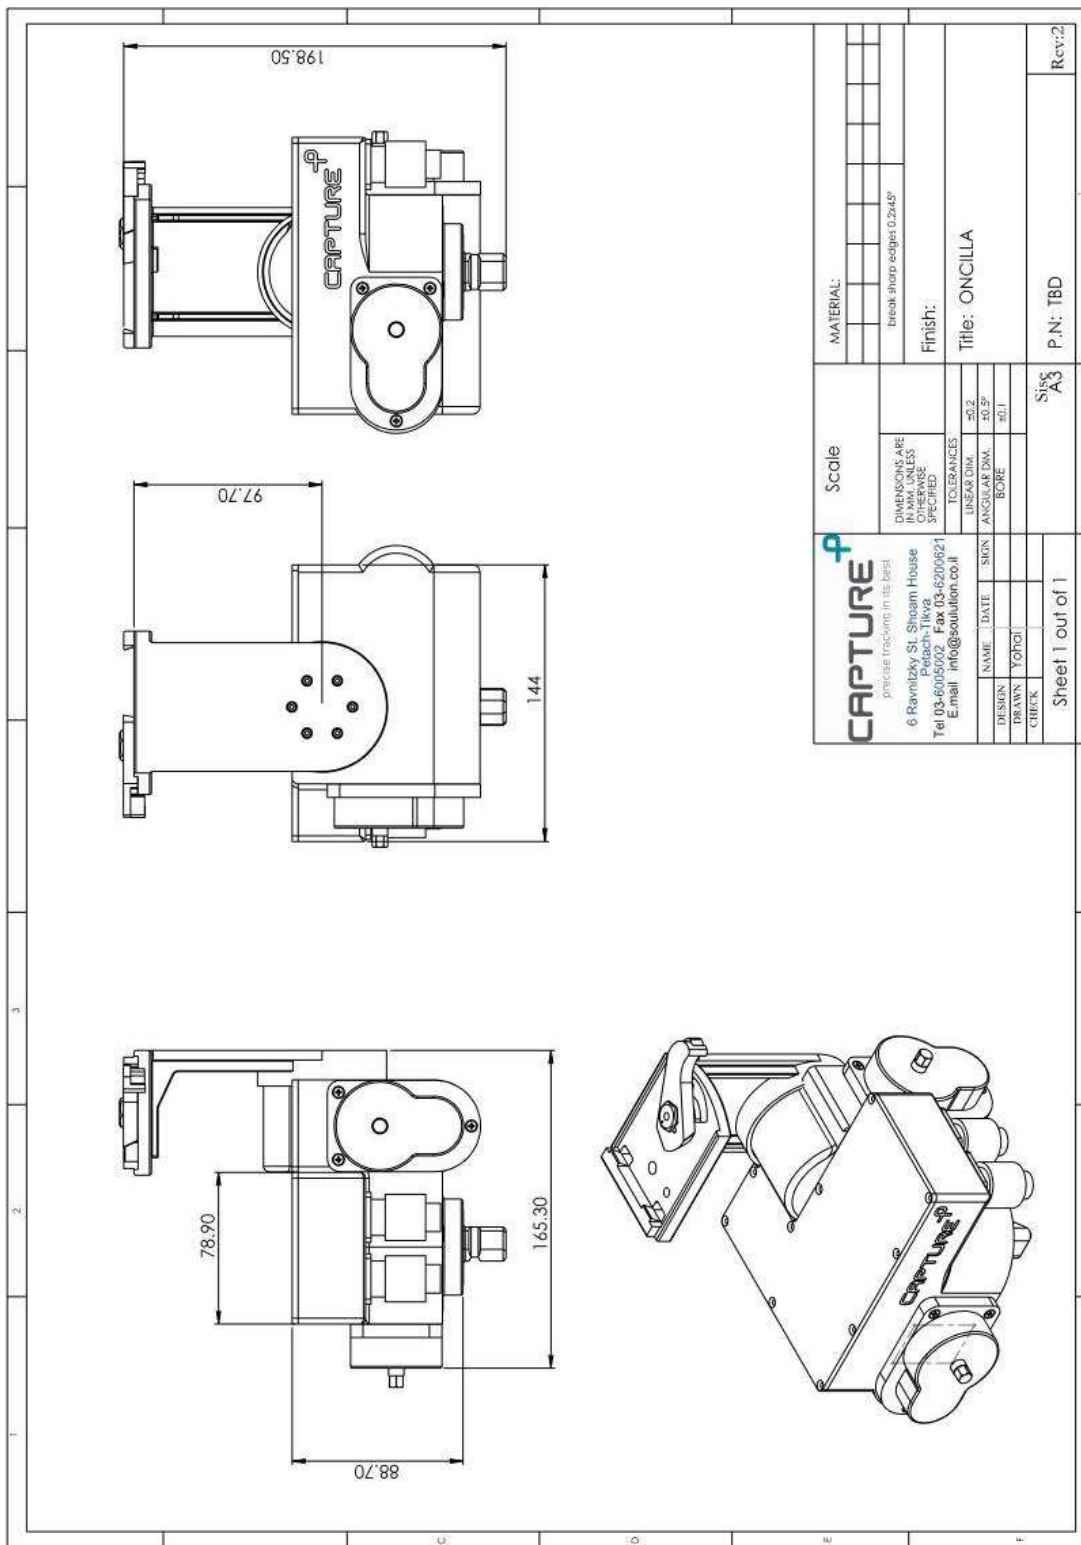

Pictures are for illustration purposes only.



Contact us at:

CAPTURE SYSTEMS LTD,
Ravnitzky St.6, Petach Tikva, Israel
Phone: +972-3-3038108
Fax: +972-3-6200621
sales@capture-sys.com
www.capture-sys.com